
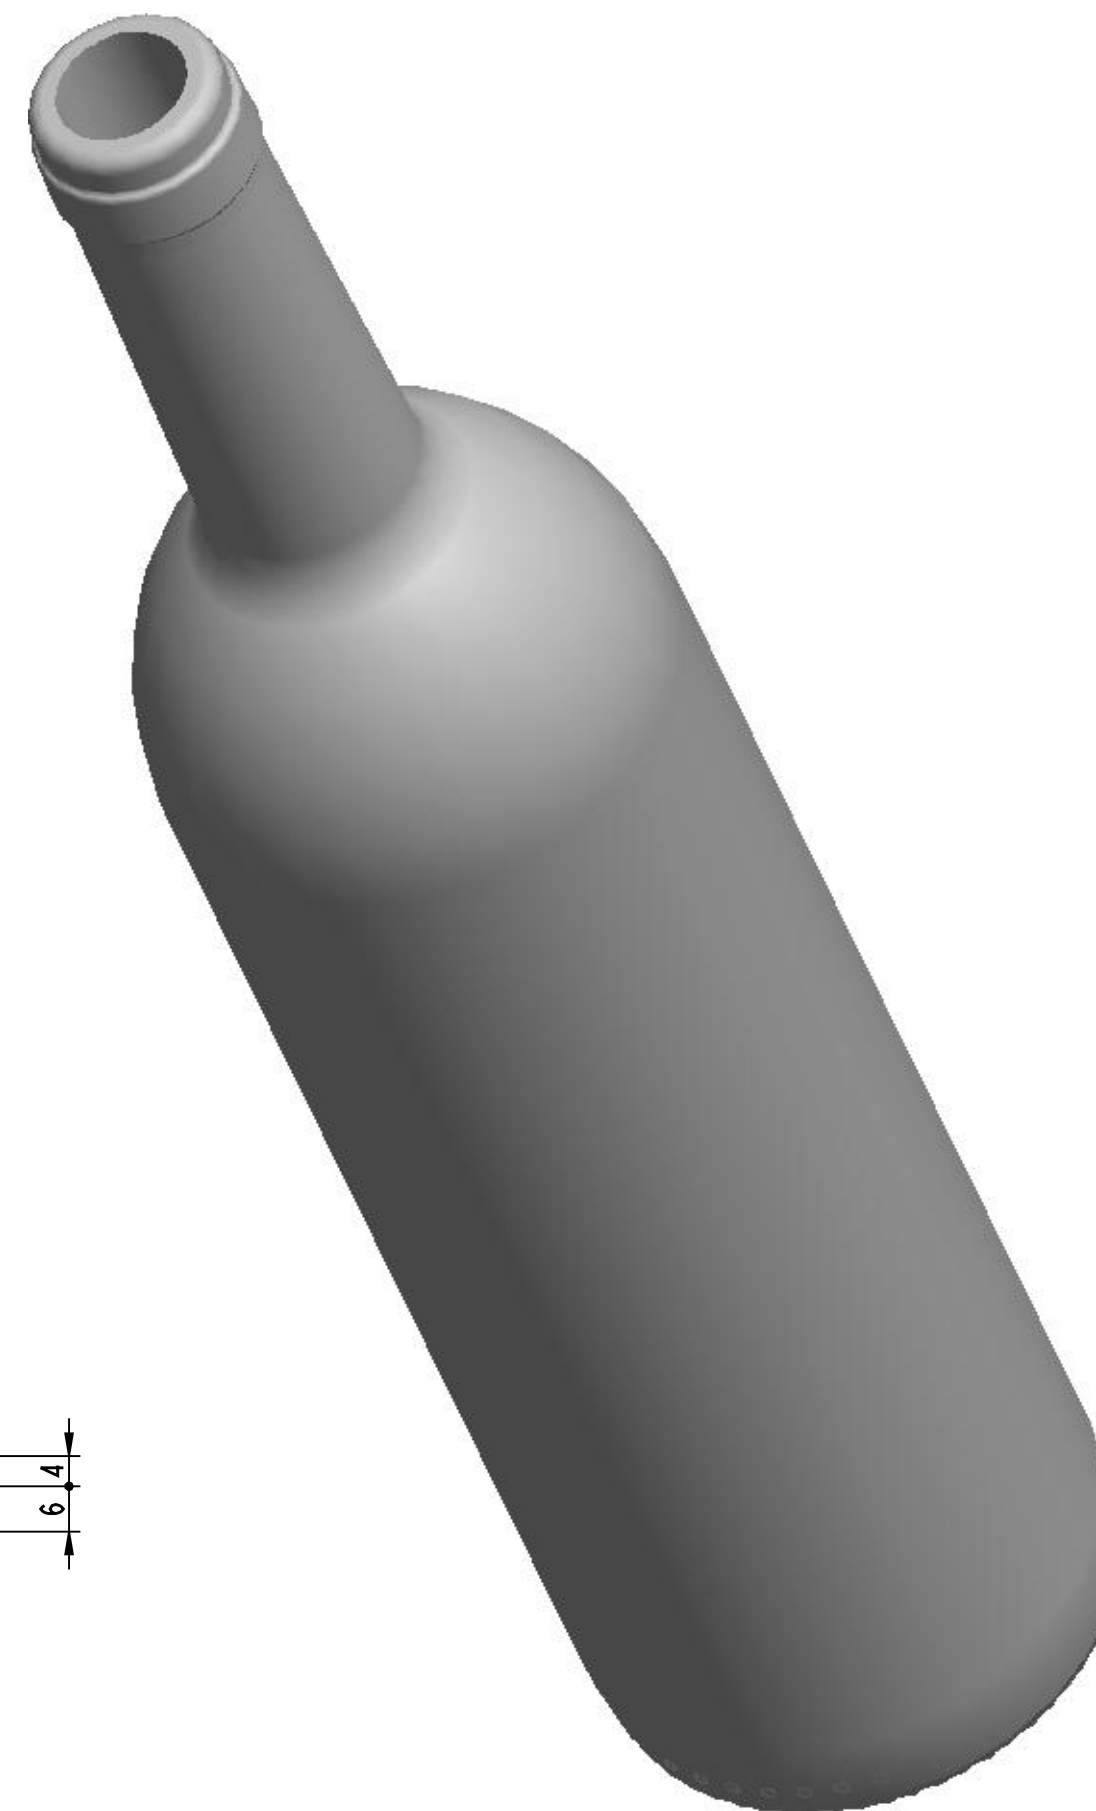
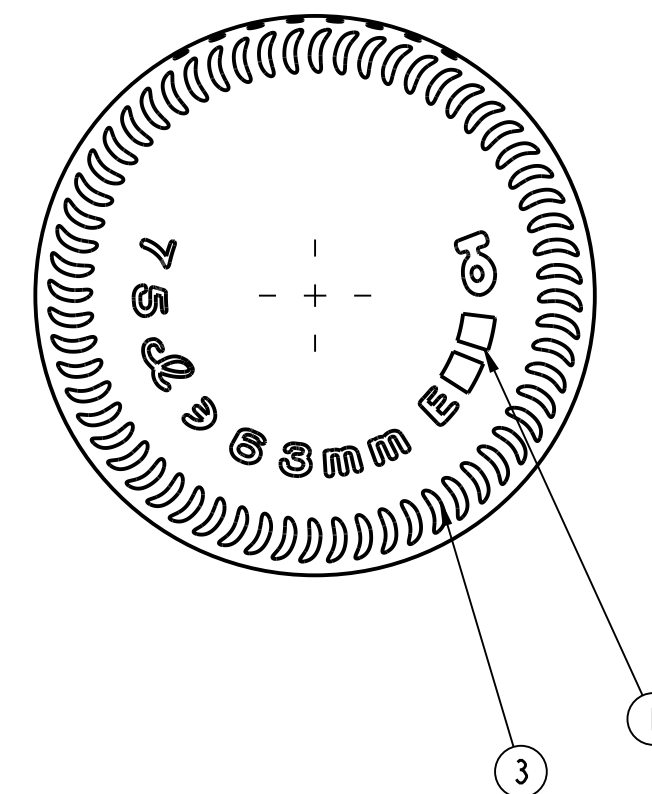
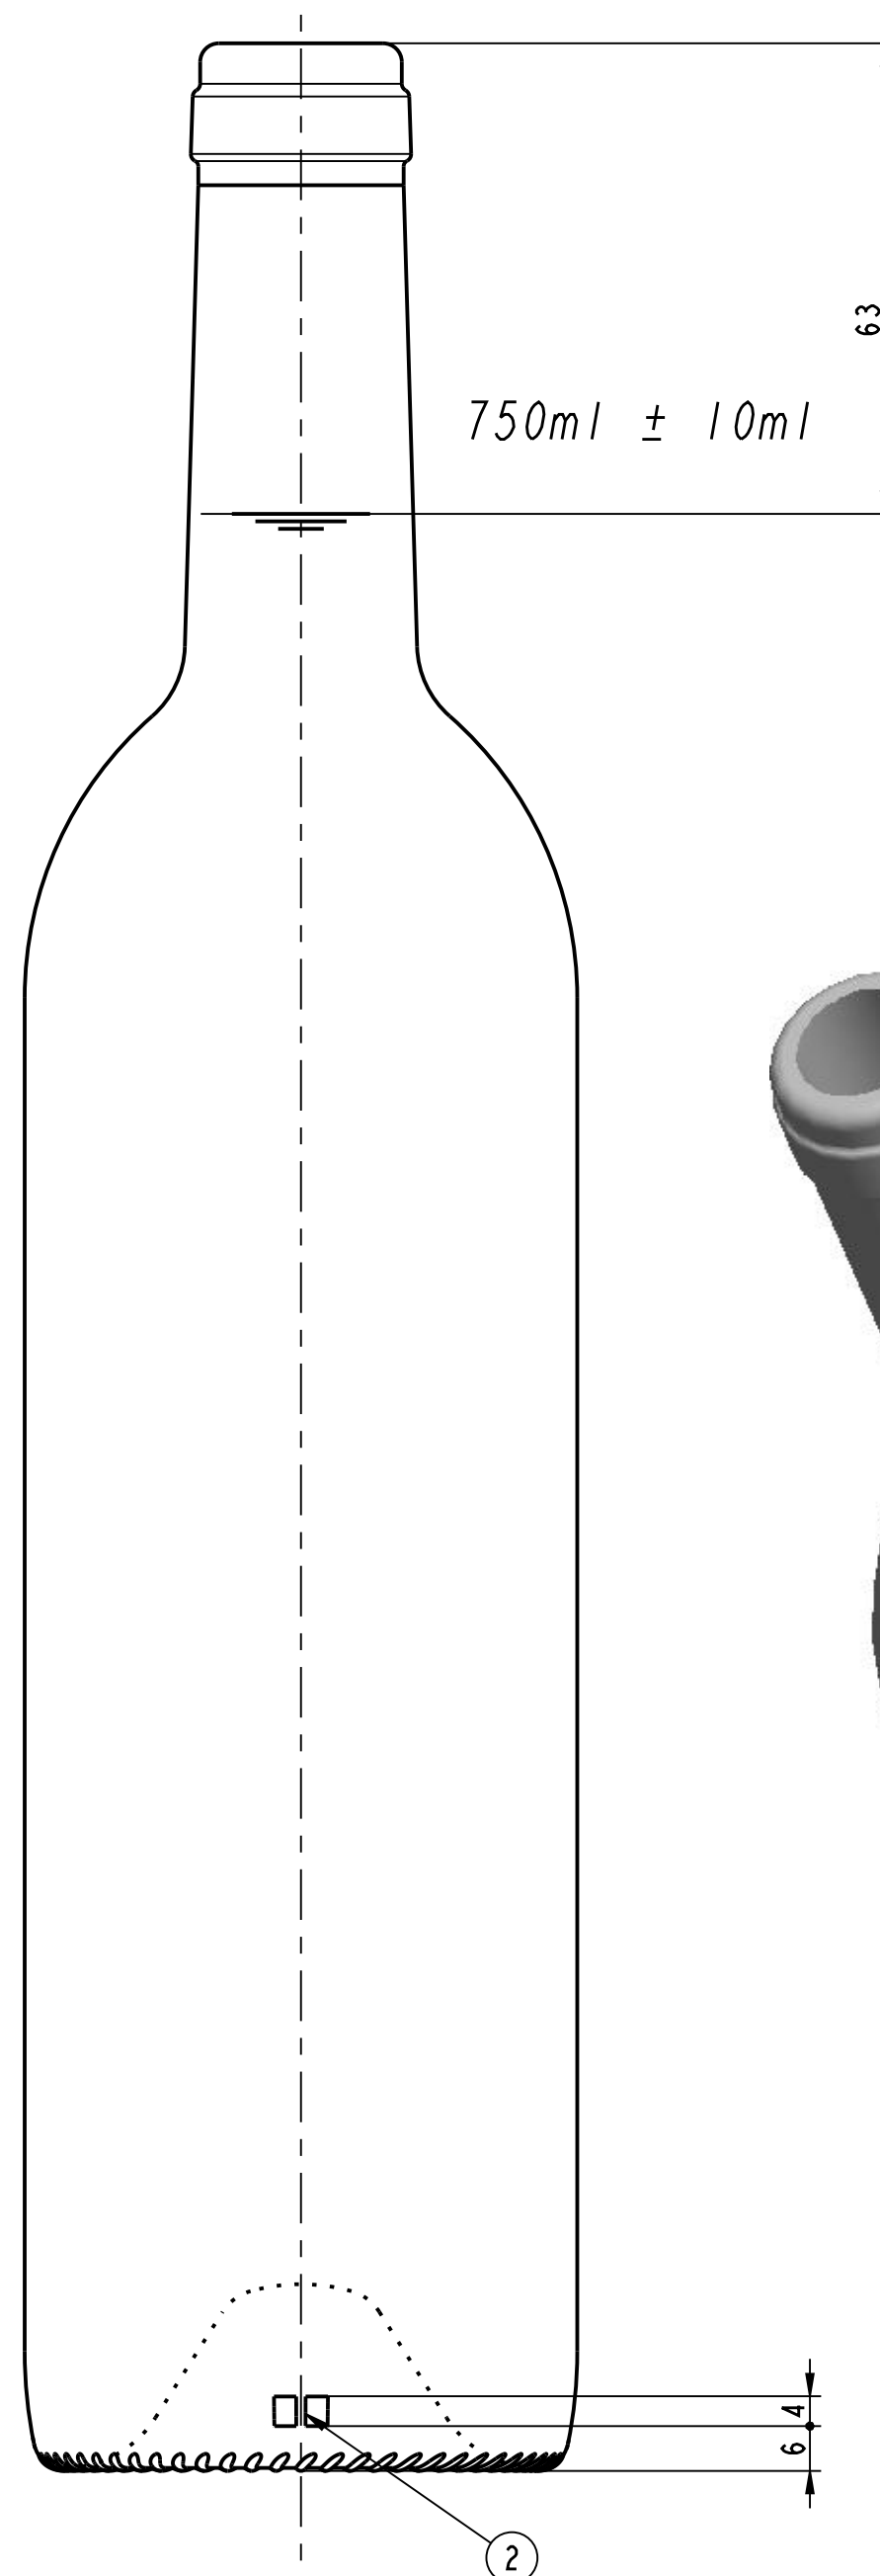


NOTES:
THIS DRAWING IS THE PROPERTY OF O-I AND
MUST NOT BE REPRODUCED OR DISCLOSED
WITHOUT O-I WRITTEN AUTHORIZATION.

ONLY TOLERANCED DIMENSIONS ARE GUARANTEED.

MANUFACTURING MARKINGS SHOWN ARE FOR ILLUSTRATIVE
PURPOSES ONLY, ACTUAL MARKINGS ON CONTAINER
MAY DIFFER, DEPENDANT ON LOCAL LEGISLATION.

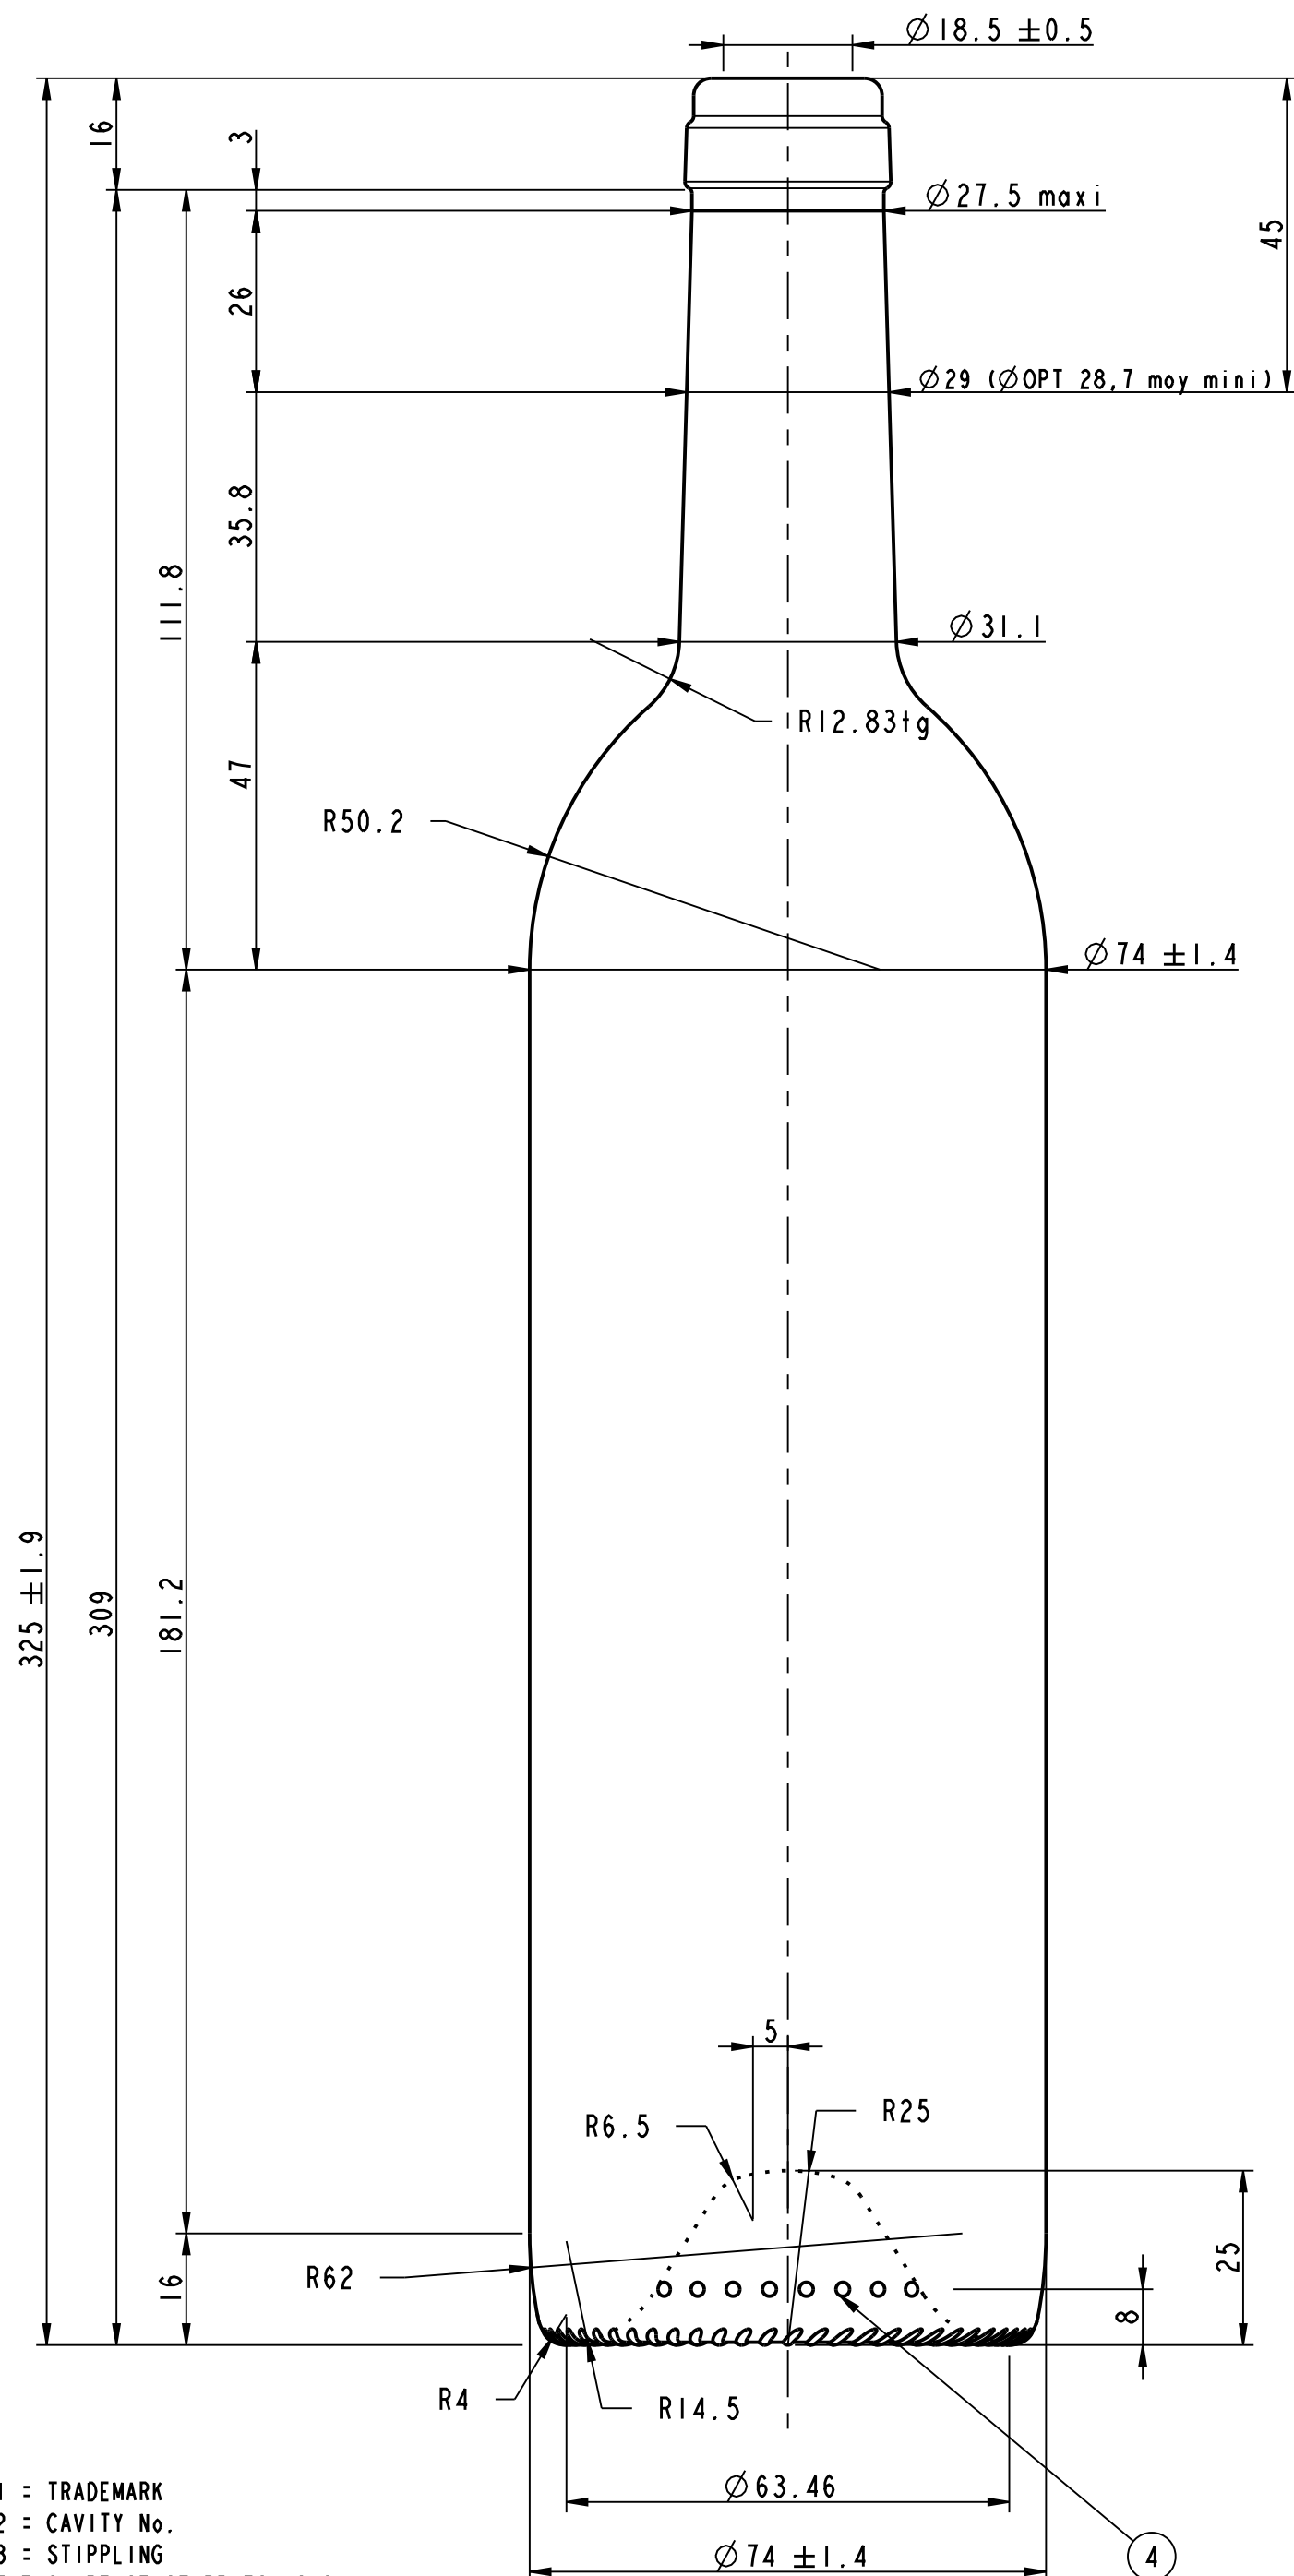

1 = TRADEMARK
2 = CAVITY No.
3 = STIPPLING
THE SHAPE OF STIPPLES IS ONLY AN
INDICATION AND THE CONSTRUCTION IS AT
THE PRODUCTION PLANT DISCRETION.
4 = CAVITY CODE

SCALE 1:1

HEAT TREATMENT 50 °C maxi	CARBONATION XX g CO2/l maxi
VERTICAL LOAD 150 daN maxi	THERMAL SHOCK 42 °C maxi
CATEGORY WINE	TILT ANGLE 14.63°
MAX. VERTICALITY TOLERANCE 3.6 mm	MEASURING CONTAINER YES
FINISH SAP NUMBER 3509	FINISH REF. CETIE GME 50.1 1994
MINIMUM THROUGH BORE 17.5 mm	MAX FILLING TUBE Ø 16 mm

CONTAINER OVERFLOW CAPACITY (BRIMFUL)

770ml APPROX.

CONTAINER RATED CAPACITY (FILLPOINT)

750ml ± 10ml

CONTAINER WEIGHT

570g APPROX.

FINISH DESIGNATION FR.27.GME 50.1.H160.3509	MAX GAS VOLUME
PROCESS	RETURNABLE NO
	DESIGN REF. Rework 1387/014

STANDARD
75 CL PRESTIGIO

DESIGNER	EBL	DATE	24/01/11
CHECKED		DATE	
DRAWING NUMBER 110077	MOULD/SAP NUMBER 019070		

No	DATE	REVISIONS	DESIGN/CHECK
	24/01/11	Updating in KBE model 001387/0014 (drawing 6885-02B)	EBL